


Dual Circle LED Flat Light

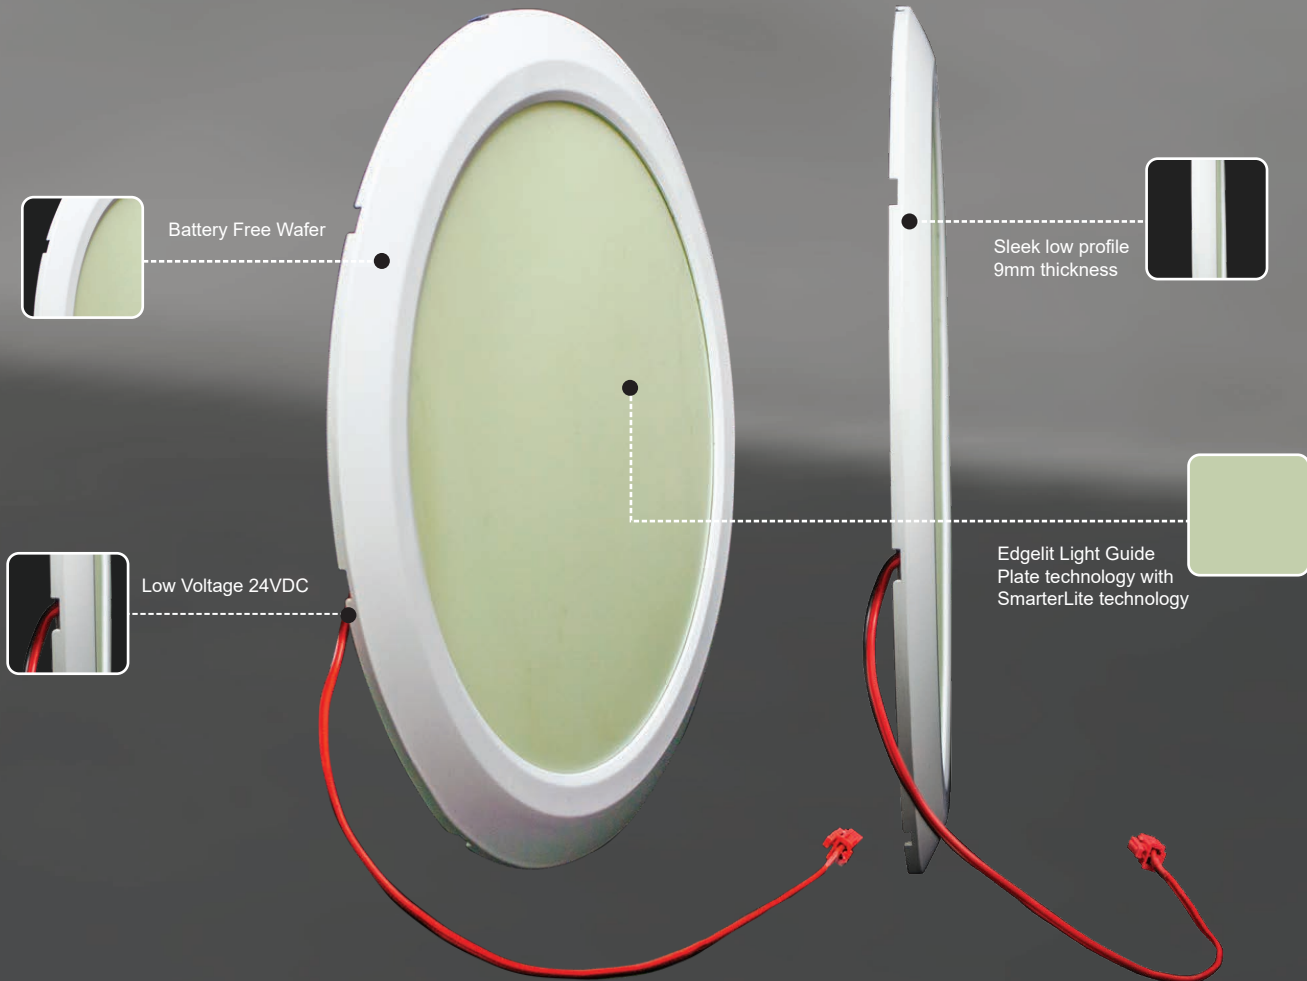

MOQ 1,000 pcs


Power Supply - INPUT : 100 ~ 200 VAC, 50/60hz

When light not dimmed Photoluminescence achieves a minimum 30 mcd/m2 for 90 minutes

Product Specification

Model Name	Size (mm)	Watt	Volt	lm/w	Angle	CRI	Color Temp	Weight
PLHCD00217W15	8" (Φ217)x9	15W	DC 24V CC/CV	-	170°	-	-	0.5kg

Dimming

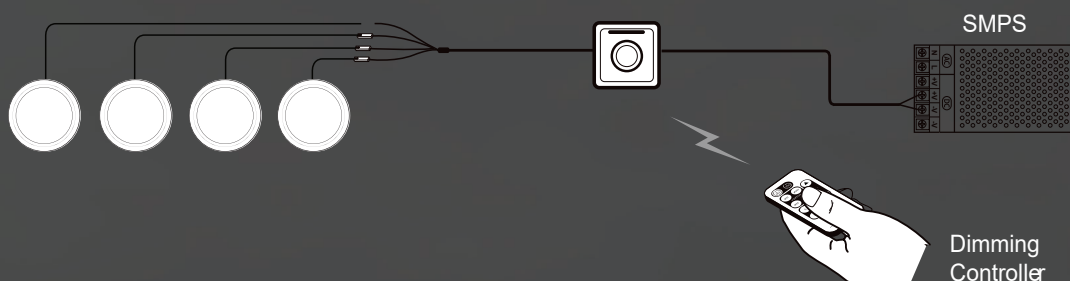


LED Lighting Features

- Use of specialized premium LED for specialized Vivacity lighting
- Use of Light Guide Plate optimized for LED lighting - DES Patents
- Dimming (color and illuminance adjustment) and remote control functions
- Replaceable with a light set assembled with an existing 80W fluorescent light
- Separate power supply (110~220VAC 50/60Hz)

Items replaceable with Vivacity 50W products


Lights Type	Amount	Reduction
Incandescent lights	100W X 3ea	84%
Flushmount Fluorescent lights	40W X 2ea	40%
Halogen lamps	50W X 2ea	80%

Specifications

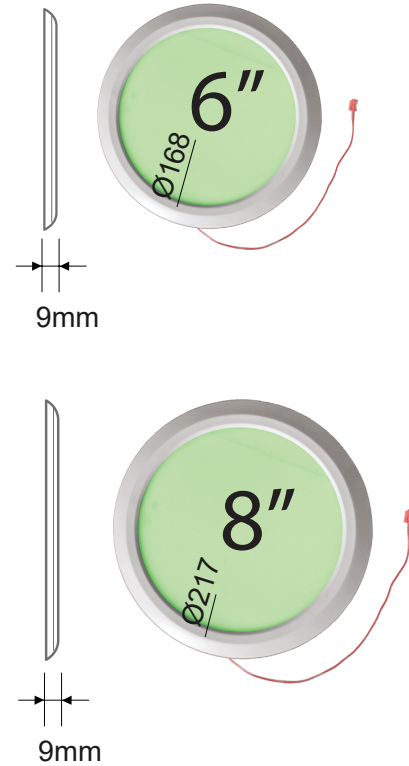


Energy-saving effect of Vivacity LED lighting

Energy consumption

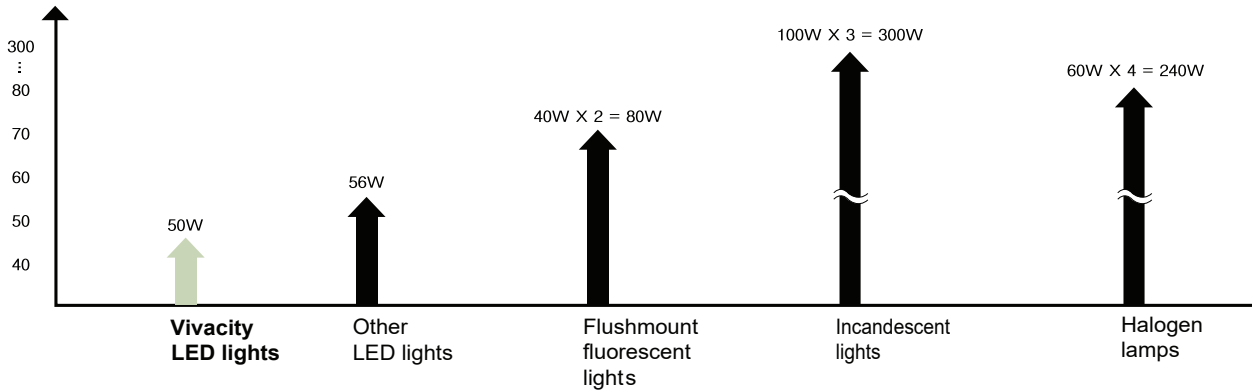

Safe and easy installation

Spring-type:
when you replace existing products

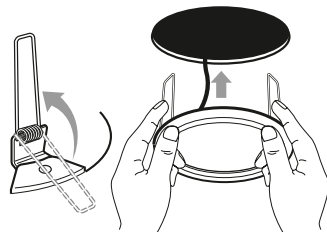

Magnetic bracket-type:
for new installation

