

## APOLLO © Heavy Duty Exit Sign

ABN 12629158069



### FEATURES:

- ✓ **Sizes** 16M, 24M, 32M, 40M
- ✓ **Fully Compliant** to Australian Codes
- ✓ **Environmentally Safe & Sustainable**
- ✓ **Ideal for Industrial and Commercial**
- ✓ **Simple & Effective**

### CONTACT

**A** Level 5/15 Queen St  
Melbourne VIC 3000

**P** +61 (3) 7004 7500  
1300 244 569

**E** [support@safetypath.com](mailto:support@safetypath.com)

**W** [www.safetypath.com](http://www.safetypath.com)

### PL EXIT SIGN REQUIREMENTS

Apollo Heavy Duty Exit Signs are available as a PL only version. A minimum of 100 Lux is required at the face of the PL exit sign.

### NCC COMPLIANCE

Safety Path PL Exit Signs are designed in accordance and compliant with Building Code of Australia, NCC Specification E4.8.

All relevant documentation shall be made available upon request.

### MAINTENANCE

The following maintenance (inspection) regime for PL exit signs may be undertaken by any competent person.

#### Six Monthly:

- ✓ Survey to ensure signs are in place, legible, not obstructed and shall be cleaned as necessary.
- ✓ Survey to ensure the general building light sources are operational and have had no unauthorised alterations.

#### Three Yearly:

- ✓ Test to ensure signs receive the minimum illumination requirement from the general building light sources.
- ✓ The illumination at the face of the sign should be checked with an illuminance meter.

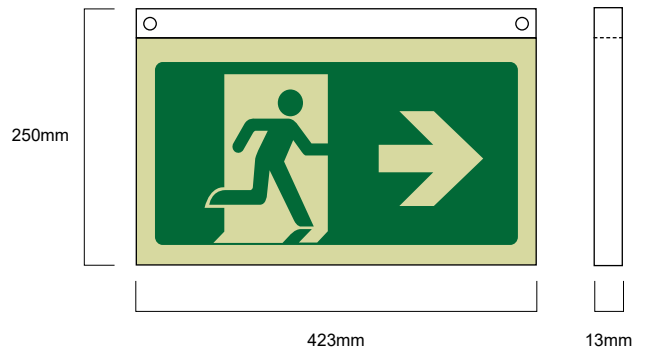


Diagram: Based on 24M Apollo Heavy Duty Exit Sign

### SPECIFICATIONS

<b>Voltage</b>	-
<b>Connection</b>	-
<b>Power</b>	-
<b>IP Rating</b>	IP68
<b>Dimensions</b>	16m - 293mm x 185mm x 13mm 24m - 423mm x 250mm x 13mm 32m - 563mm x 325mm x 13mm 40m - 703mm x 400mm x 13mm
<b>Material</b>	Core - PVC
<b>Pictorials</b>	Permanent fixed directions
<b>Warranty</b>	20 Years
<b>Compliance</b>	NCC Specification E4.8 AS2293.1 (Relevant PL Clauses) AS3000 (cl 1.9.32)
<b>Colour</b>	White
<b>Viewing Distance</b>	16m, 24m, 32m, 40m
<b>Mounting Type</b>	Ceiling Mount (16m, 24m only) Wall Mount Suspended
<b>Weight</b>	16m - 0.75kgs 24m - 1.5kgs 32m - 2.75kgs 40m - 4kgs

## PRODUCT RANGE




### Apollo Heavy Duty Exit Sign

Code	Description	Direction
EP16SSN	16m SS NEUTRAL	Single Sided Neutral (Straight Ahead)
EP16SSL	16m SS LEFT	Single Sided Left Arrow
EP16SSR	16m SS RIGHT	Single Sided Right Arrow
EP16DSN	16m DS NEUTRAL	Double sided Neutral (Straight ahead)
EP16DSD	16m DS DIRECTIONAL	Double Sided Directional
EP24SSN	24m SS NEUTRAL	Single Sided Neutral (Straight Ahead)
EP24SSL	24m SS LEFT	Single Sided Left Arrow
EP24SSR	24m SS RIGHT	Single Sided Right Arrow
EP24DSN	24m DS NEUTRAL	Double sided Neutral (Straight ahead)
EP24DSD	24m DS DIRECTIONAL	Double Sided Directional
EP32SSN	32m SS NEUTRAL	Single Sided Neutral (Straight Ahead)
EP32SSL	32m SS LEFT	Single Sided Left Arrow
EP32SSR	32m SS RIGHT	Single Sided Right Arrow
EP32DSN	32m DS NEUTRAL	Double sided Neutral (Straight ahead)
EP32DSD	32m DS DIRECTIONAL	Double Sided Directional
EP40SSN	40m SS NEUTRAL	Single Sided Neutral (Straight Ahead)
EP40SSL	40m SS LEFT	Single Sided Left Arrow
EP40SSR	40m SS RIGHT	Single Sided Right Arrow
EP40DSN	40m DS NEUTRAL	Double sided Neutral (Straight ahead)
EP40DSD	40m DS DIRECTIONAL	Double Sided Directional

## MOUNTING OPTIONS

Suspended

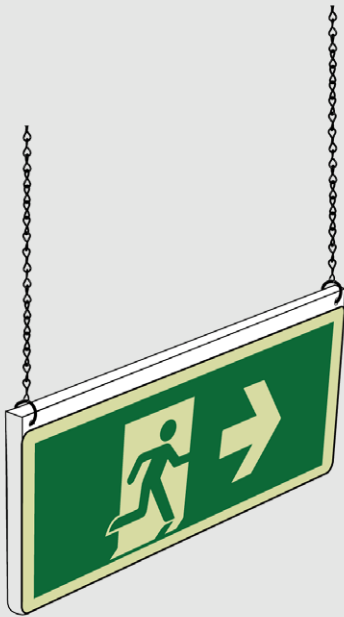

Ceiling Mounted  
(16m, 24m only)



Wall Mounted

